

BPC Train-A3672



Fanless Train PC with Intel® Core™ i7-2610UE



Features

- Fanless and rugged design
- M12 connector for DC power input with isolated protection
- Isolated RS-232/485 and GPIO
- Support Outside Accessible CFast and SIM Slot
- Support Optional WiFi or HSUPA wireless connection
- Support power on/off delay control
- Removable Bay : Support 2 x 2.5" drive bays for SATA SSD
- Compliant with EN50155

System

CPU	Soldered onboard Intel® Core™ i7-2610UE 1.5GHz
Memory	1 x 204-pin SO-DIMM sockets, supporting DDR3 1066/1333 MHz, up to 8GB SDRAM
Chipset	Intel® PCH QM67
Graphics	Integrated Intel® HD Graphics 3000
SATA	2 x Serial ATA ports with 300MB/s HDD transfer rate 2 x Serial ATA ports with 600MB/s HDD transfer rate
Connectivity	802.11 a/b/g/n Wireless LAN Mini-card (optional) HSUPA (3.75G) Mini-card (optional)
LAN Chipset	1x Intel® 82579LM GbE PHY 2 x Intel® 82583V GbE controllers
Watchdog Timer	1~255 levels reset

I/O

Serial Port	1 x RS-232/485 with DB-9 connector, rear side, 2.5 KV isolated protection 3 x RS-485 ports with M8-Female 3P connectors, rear side, IP67, 2.5 KV isolated protection
USB Port	2 x USB 2.0 ports type A connector, front side 2 x M8-Female 4P connector, IP67, rear side
LAN	1 x RJ-45 port for Gigabit Ethernet, front side 2 x M12-Female 8P connectors, IP67 for Gigabit Ethernet, rear side, support WOL
Video Port	1 x DVI-I Female connector with DVI-D and VGA output
Digital I/O	1 x 10-bit digital I/O (6 in/4 out) with DB-15 female connector, 2KV isolated protection
Antenna	4 x SMA-Female connectors' holes for external antennas
Audio	1 x M12-Female 8P connector, IP67 for Mic-in & Line-out (6W pre-amplified)
Expansion Bus	1 x Mini-PCIe slot for optional WiFi/GPS module 1 x Mini-PCIe slot interconnected with SIM card socket for optional HSUPA/LTE module 1 x SIM socket (outside accessible)

eBPC Computer für Industrie
Computer for Industry

Environmental

Operating Temp.	-25 ~ 55°C (-13 ~ 131°F), ambient w/ air flow, EN50155 ClassT1
Storage Temp.	-40 ~ 80°C (-40 ~ 185°F)
Relative Humidity	5 ~ 95% @ 40°C (non-condensing)
Damp Heat	55°C, 95% RH (non-operating, EN 50155-10.2.5)
Vibration	EN61373 Category 1 Class B
Shock	EN61373 Category 1 Class B

Qualification

Certification	CE, FCC Class A, Compliant with EN50155
----------------------	---

Power Requirement

Power Input	DC 9~36V input, w/ M12 connector, 2KV isolated protection
--------------------	---

Power Consumption	Max. 50W
--------------------------	----------

Power Management	Power on/off delay controlled by software
-------------------------	---

Storage

Type	2 x 2.5" removable drive bays for SATA SSD 1 x SATA port for SATA DOM 1 x outside accessible CFast socket with protection cover
-------------	---

Mechanical

Construction	Aluminum alloy
Mounting	Support wall-mount
Weight	5.07Kg (11.15 lb)
Dimensions (W x D x H)	254.6 x 208 x 90 mm (9.99" x 8.18" x 3.54")

OS Support

Windows 7 / 8 / 10 Standard/Windows Embedded Linux Kernel 2.6X

Ordering Information

Train-A3672	Train PC Barebone system w/ Intel® Core™ i7-2610UE, w/o storage device and memory, w/ 2 x removable drive bays
--------------------	--


Alptech Elektronik GmbH



Zimmersmühlenweg 14-18 Tel: 06171-9799110 E-Mail: info@alptech.de

D-61440 Oberursel/Ts. Fax: 06171-9799115 www.alptech.de

Dimensions

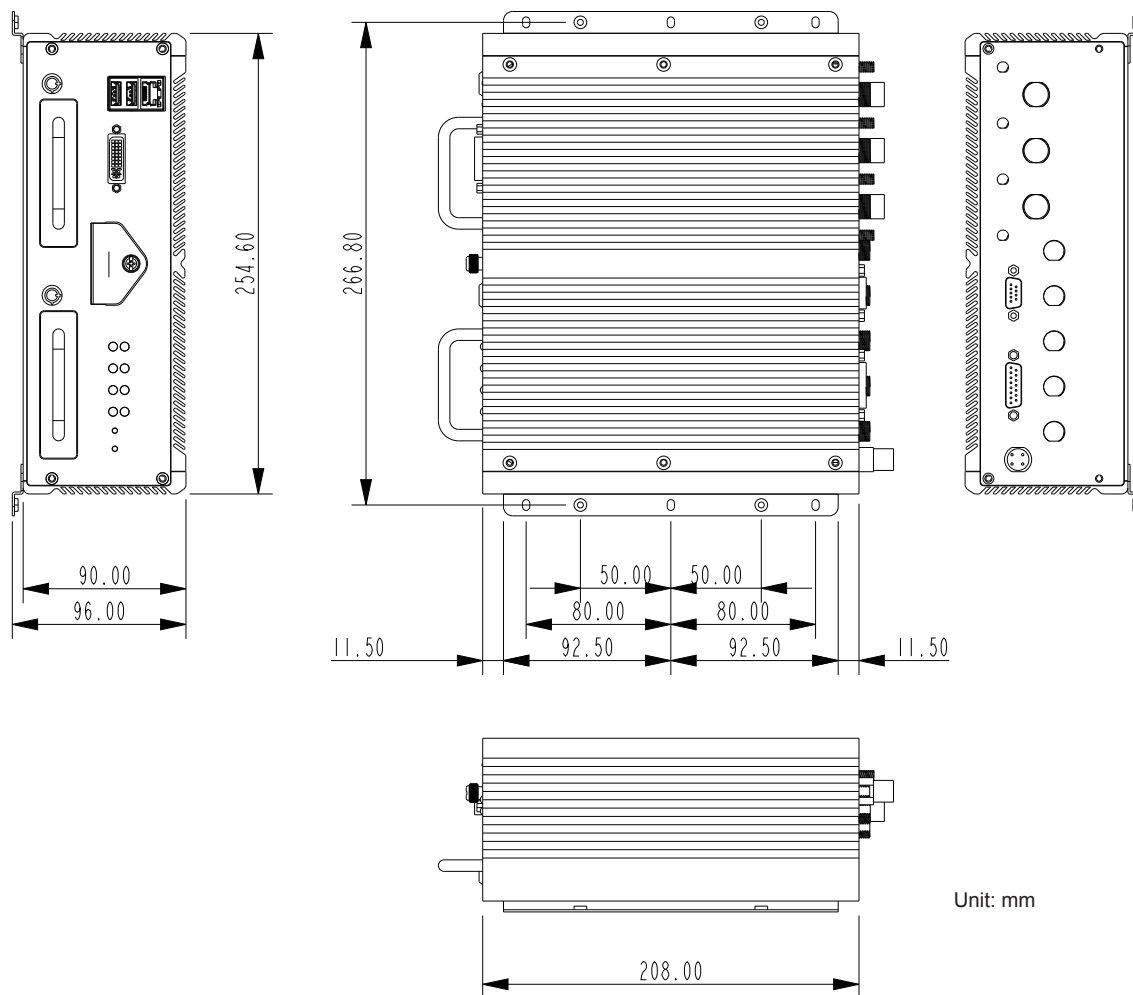

Optional Accessory

PAC-P120W-FSP 19V/5.96A 120W AC/DC adapter kit



Optional Configuration (CTOS* Kit)

SSD-25032 Memoright 2.5" 32GB SATAII SSD kit

SSD-25016 Memoright 2.5" 16GB SATAII SSD kit



WIFI-IN1350 Intel® Centrino® Advanced-N 6205 WiFi module w/ 20cm & 30cm internal wires


HSPA-SI1400 HSUPA 3.75G module kit & internal wire

ANT-D11 1 x WiFi Dual-band 2.4G/5G antenna

ANT-H11 1 x 2dBi HSUPA antenna

2GB SO-DIMM Industrial DDR3-1333 2GB SDRAM

4GB SO-DIMM Industrial DDR3-1333 4GB SDRAM



*CTOS means Configure-to-Order Service.